



DYNASTY® 9200 (RIGHT ANGLED STACK NO FLOOR TRACK REQUIRED)



FREECALL 1800 396 264



DYNASTY® 9200 (RIGHT ANGLED STACK NO FLOOR TRACK REQUIRED)

The **Dynasty 9200 Series** is versatile and easy to operate. There are no floor tracks, removable mullions, or the need for complicated bulkheads, giving greater flexibility in design and operation, as there's no need for costly motorisation. Suitable for a variety of internal and external situations such as bars, gaming areas, cafés and more, this is one of our most popular doors for wide openings.

SPECIFICATIONS

Supply and install DYNASTY® Model 9200 by Dynamic Closures (specify).

WORK EXCLUDED

The general contractor shall supply adequate wood or metal supports. Minimum structural capacity to support (145kg per linear metre of door).

CONSTRUCTION

Meeting stiles shall be interlocking extruded aluminium members (32mm x 73mm). Sections shall be extruded from aluminium and constructed in accordance with details shown on shop drawings. Should fixed panels be required they shall be of matching construction. Brush weather seal at floor optional.

PANELS

Available in the following materials:
6.38mm Clear Laminated Glass
18ga. Perforated (51%) Visibility Panels

TRACK

Track shall be heavy-duty extruded aluminium [38mm (h) x 36mm (w) – two tracks side by side] extra strength material and shall be surface mounted or recessed as required (specify).

HARDWARE

To be Dynamic's heavy duty auto retractable cylinder locks on access panels. All other panels shall be secured with a conveniently located shootbolt system that will lock into a specially designed dust resistant floor socket.

FINISH

All models are offered in our standard high quality clear anodised finish, or standard powder coat finishes.

LAYOUT

STACK WIDTH: 70mm per panel + 40mm.


STACK DEPTH: Panel size plus 50mm
(add 35mm for every additional panel)

Example of a 914mm Panel (Nominal Size):

PANELS	STACK WIDTH	STACK DEPTH
3	250mm	1034mm
7	530mm	1174mm
10	740mm	1279mm

- > It is imperative that ceiling and floor are level.
- > Stacks left and/or right off wall.
- > Also available in bi-part stacking half left & half right.

■ STRAIGHT STAGGERED STACK (MAX HEIGHT 3600MM)

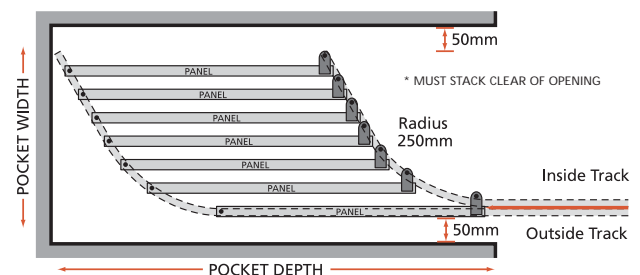

AVAILABLE WITH 45°, 60° AND 90° CURVES.