



## DYNASTY 9200 SERIES (STAGGERED STACK NO FLOOR TRACK REQUIRED)



|           |                    |                     |
|-----------|--------------------|---------------------|
| Melbourne | ph: (03) 9739 5222 | fax: (03) 9739 5599 |
| Sydney    | ph: (02) 9899 2216 | fax: (02) 9899 2246 |
| Brisbane  | ph: (07) 3805 8055 | fax: (07) 3805 8015 |
| Perth     | ph: (08) 9343 8329 | fax: (08) 9343 1725 |
| Adelaide  | ph: (08) 8326 2266 | fax: (08) 8384 3570 |

**FREECALL 1800 651 649**

All openings for the Dynasty must be square & level & prepared to manufacturer's tolerances. Specification correct at time of printing. May alter without notice.



## DYNASTY 9200 SERIES (STAGGERED STACK NO FLOOR TRACK REQUIRED)

Dynamic's **DYNASTY® RANGE** of sliding closures are versatile and easy to operate. There are no floor tracks, removable mullions, or the need for complicated bulkheads. The **DYNASTY® RANGE** of doors give great flexibility in design and can be operated without the need for costly motorisation. Our products suit a variety of internal or external situations such as bars, receptions, gaming areas and cafés and are well suited to wide openings.

### SPECIFICATIONS

Supply and install **DYNASTY® Model 9200** by Dynamic Closures (specify).

### WORK EXCLUDED

The general contractor shall supply adequate wood or metal supports. Minimum structural capacity to support (145kg per linear metre of door).

### CONSTRUCTION

Meeting stiles shall be interlocking extruded aluminium members (32mm x 73mm). Sections shall be extruded from aluminium and constructed in accordance with details shown on shop drawings. Should fixed panels be required they shall be of matching construction. Brush weather seal at floor optional.

### PANELS

Available in the following materials:  
6.38mm Clear Laminated Glass  
18ga. Perforated (51%) Visibility Panels

### TRACK

Track shall be heavy-duty extruded aluminium [ 38mm (h) x 36mm (w) – two tracks side by side ] extra strength material and shall be surface mounted or recessed as required (specify).

### HARDWARE

To be Dynamic's heavy duty auto retractable cylinder locks on access panels. All other panels shall be secured with a conveniently located shootbolt system that will lock into a specially designed dust resistant floor socket.

### FINISH

All models are offered in our standard high quality clear anodised finish, or standard powder coat finishes.

### LAYOUT

**STACK WIDTH:** 70mm per panel + 40mm.


**STACK DEPTH:** Panel size plus 50mm  
(add 35mm for every additional panel)

Example of a 914mm Panel (Nominal Size):

| PANELS | STACK WIDTH | STACK DEPTH |
|--------|-------------|-------------|
| 3      | 250mm       | 1034mm      |
| 7      | 530mm       | 1174mm      |
| 10     | 740mm       | 1279mm      |

- > It is imperative that ceiling and floor are level.
- > Stacks left and/or right off wall.
- > Also available in bi-part stacking half left & half right.

### STRAIGHT STAGGERED STACK (MAX HEIGHT 3600MM)

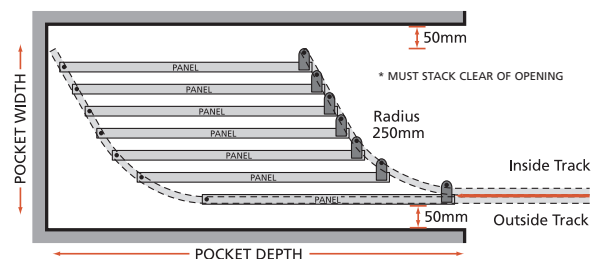

AVAILABLE WITH 45°, 60° AND 90° CURVES.